


The All-In-One Solution for Internet Connectivity and Telephony!

The Linksys Wireless-G ADSL Gateway with 2 Phone Ports is the all-in-one solution for Internet connectivity. The ADSL Modem function gives you a blazing fast connection to the Internet, far faster than a dial-up, and without tying up your phone line.

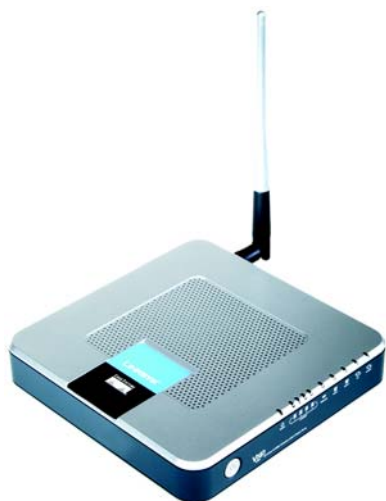

Connect your computers to the Gateway via the built-in 4-port 10/100 Ethernet Switch. Attach four PCs directly, or connect more hubs and switches to create as big a network as you need. The built-in Wireless-G (802.11g) Access Point lets you connect up to 32 wireless devices to your network at up to a blazing 54Mbps, without running cables through the building. It's also compatible with Wireless-B (802.11b) devices, at up to 11Mbps. Once your PCs are hooked up, you can share files, printers, hard drive space and other resources and the Gateway's Router function lets your whole network share your high-speed Internet connection.

Finally, there's a built-in phone adapter which enables high-quality feature-rich telephone service through your high-speed connection even while you're surfing the Internet. There are two standard telephone jacks, each operating independently—like having two phone lines. With an appropriate Internet telephone service provider, you'll get low domestic and international phone rates and lots of other available special phone features.

To protect your data and privacy, the Wireless-G ADSL Gateway features an advanced firewall to keep Internet intruders and attackers out. Wireless transmissions can be protected by powerful WPA data encryption. Configuration is a snap with any web browser.

With the Linksys Wireless-G ADSL Gateway with 2 Phone Ports at the heart of your network, you're connected to the future.

ADSL2+ Modem, Internet-sharing Router, 4-Port Switch and Wireless-G Access Point in one box

High-speed ADSL2+ Modem gives you a fast, "Always On" connection to the Internet

Connect your home PCs and other wireless devices to the Gateway and the Internet using the built-in Wireless-G Access Point, or connect directly with the 4-port Ethernet Switch

Two standard phone jacks enable feature-rich telephone service over your DSL Internet connection

Wireless-G

ADSL Gateway

with 2 Phone Ports

Product Data



Wireless-G ADSL Gateway with 2 Phone Ports

Features

- Supports 802.11g and 802.11b wireless LAN
- Built-in ADSL modem with G.lite, G.dmt, and T1.413 support
- Supports 4 10/100 Auto MDI/MDI-X LAN switch ports
- Enhanced security management functions: Port Filtering, MAC and IP Address Filtering, DMZ Hosting, and NAT Technology
- Built-in web graphical user interface for easy configuration from any web browser
- Support for RFC1483, PPPoE and PPPoA connections
- Stateful Packet Inspection (SPI) firewall with Denial of Service (DoS) prevention
- Wireless Access Lists to enhance wireless security
- Supports VPN Passthrough for IPSec, PPTP, and L2TP Protocols
- Supports Static and Dynamic Routing (RIP1 and 2)
- DHCP Server capability to assign IP addresses automatically
- Remote administration and remote upgrades available over the Internet
- E-mail and Web-based Logging of Security Events
- Supports traffic and event logging
- Support for NTP (Network Time Protocol) for Synchronizing with a Real-Time Server
- Support for Broadcast SSID Disable
- Supports Session Initiation Protocol (SIP)
- Supports DTMF tone detection and generation
- Supports Echo Cancellation (G.168)
- Supports multiple voice compression G.711, G.726, G.729

Specifications

Model Number	WAG54GP2
Standards	IEEE 802.11g, IEEE 802.11b, IEEE 802.3u, G.992.1 (G.dmt), G.992.2 (G.lite), T1.413i2 Issue 2, G.992.3, G.992.5
Ports	Power, ADSL, Ethernet (1-4), Phone (1-2)
Button	Reset
Cabling Type	CAT 5 UTP, RJ-11
LEDs	Power, Wireless-G, Ethernet (1-4), Phone (1-2), DSL, Internet
Transmit Power	18 dBm
UPnP able/cert	Able
Security Features	Password protected configuration for web access PAP and CHAP authentication Denial of Service (DoS) Prevention URL filtering, and keyword, Java, ActiveX, Proxy, Cookie blocking ToD filter (Blocks Access by Time) VPN Passthrough for IPSec, PPTP, and L2TP Protocols 128, 64 bits WEP with Passphrase WEP key generation SSID Broadcast Disable Access restriction by MAC and IP addresses
WEP Key Bits	64, 128

Environmental

Dimensions W x H x D	6.69" x 6.69" x 1.22" (170 mm x 170 mm x 31 mm)
Unit Weight	14.39 oz. (0.41 kg)
Power	12VDC, 1.25A
Certifications	FCC Part 15B Subpart B Class B, FCC Part 15C Subpart B, FCC Part 168, CE
Operating Temp.	32°~104°F (0°~40°C)
Storage Temp.	-4°~158°F (-20°~70°C)
Operating Humidity	10~85% Non-condensing
Storage Humidity	5~90% Non-Condensing

Linksys
A Division of Cisco Systems, Inc.
18582 Teller Avenue
Irvine, CA 92612 USA

E-mail: sales@linksys.com
support@linksys.com

Web: <http://www.linksys.com>

Linksys products are available in more than 50 countries, supported by 12 Linksys Regional Offices throughout the world. For a complete list of local Linksys Sales and Technical Support contacts, visit our Worldwide Web Site at www.linksys.com.

Minimum Requirements

- PC with a Network Adapter and the TCP/IP Protocol Installed
- CD-ROM Drive
- Internet Explorer 4.0 or Netscape Navigator 4.7 or Higher for Web-based Configuration
- Activated ADSL Line
- Activated Voice over IP Service

Package Contents

- Wireless-G ADSL Gateway with 2 Phone Ports
- Power Adapter
- User Guide on CD-ROM
- Network Cable
- Phone Cable
- Quick Installation
- Registration Card

Specifications are subject to change without notice. Linksys is a registered trademark or trademark of Cisco Systems, Inc. and/or its affiliates in the U.S. and certain other countries. Copyright © 2005 Cisco Systems, Inc. All rights reserved. Other brands and product names are trademarks or registered trademarks of their respective holders.